NORSEAL
SPECIALIST SEAL SOLUTIONS

E-STRIP

NORSEAL

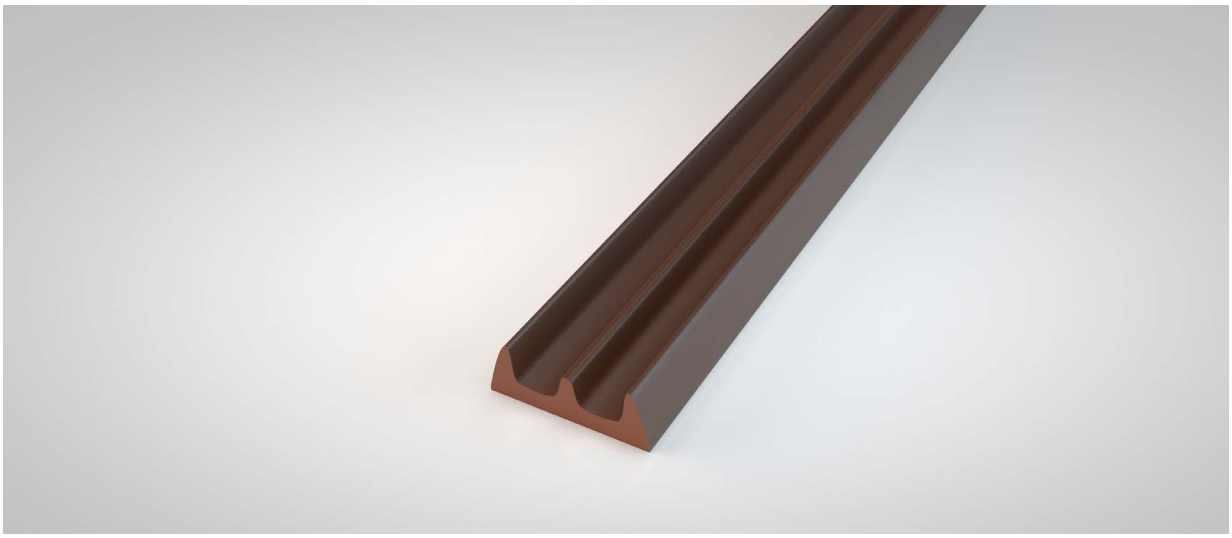

Application
Timber door and window frames

Recommended gap (mm)
2-3

Fixing
Self-adhesive

Performance
Excellent for retrofitting to casement windows without the need for routing
Can be used to seal the top and bottom of a sash window
Can be used in doorsets
UV and Ozone stable
Very good ageing properties

Material
Closed Cell EPDM

Length
125m coil; 25m increments

Colours
White ***(WHT)*** / Black ***(BLK)***

Order codes
E100 + Colour + -Length
eg. *E100WHT-125*
(White, 125m coil)

Dimensions

5 Regents Drive
Prudhoe
Northumberland
NE42 6PX

norseal.co.uk sales@norseal.co.uk 01661 830088

Registered in Companies House Cardiff No. 04317595 VAT Reg. No. 733 9466 08