


## STADI L-24/20 WS

ATHMER

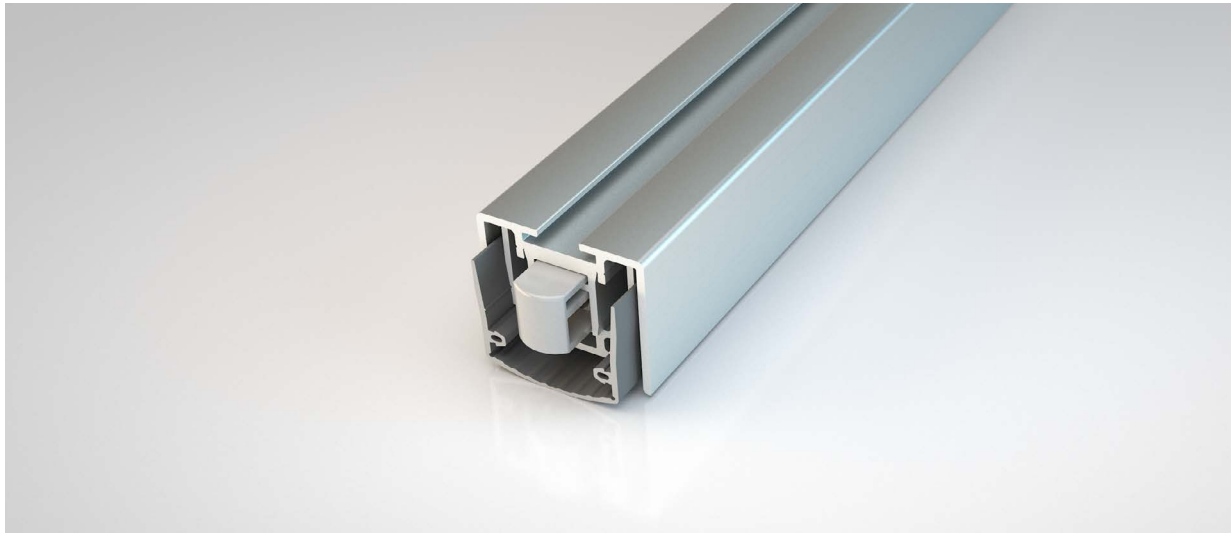

### Application

Bottom edge of acoustic metal doorsets

### Performance

Smoke tested in accordance with BS 476-31.1  
Acoustically tested in accordance with  
BS EN ISO 10140-2  
Certifire CF5675  
Option for flush bolt integration

### Material

Aluminium (Mill finish), Silicone gasket (Grey)

### Standard lengths (mm)

750, 900, 1050, 1200

### Minimum / Maximum length (mm)

250 / 2000

### Maximum gap coverage (mm)

16

### Actuation

Single

### Cutback (mm)

150

### Fixing

Rebated, held in place with angle brackets


### Order codes

**1-603- + Length (4 digits)**

eg. 1-603-0750 (750mm)

Other lengths available on application

### Dimensions



 5 Regents Drive  
Prudhoe  
Northumberland  
NE42 6PX

 [norseal.co.uk](http://norseal.co.uk)

 [sales@norseal.co.uk](mailto:sales@norseal.co.uk)

 01661 830088

Registered in Companies House Cardiff No. 04317595 VAT Reg. No. 733 9466 08